


## Vertical Barrier Walls

Environmental engineers look for solutions to isolate industrial contaminants, leachate and methane gas. For the control of lateral migration of groundwater and gases, Environ PE30 is an excellent alternative to consider.

- Installs easily with conventional construction equipment
- Maximizes profitability with material costs 20-25% less than steel piling
- Increases manageability, while significantly reducing transportation costs with light weight of the product
- Reduces disturbance of contaminated soil because excavation is not required
- Decreases disposal costs for projects
- Welds easily to HDPE liners
- Provides highest chemical resistance and extended service life



- Levee Reinforcement
- Cut-off Walls
- Wetland Creation
- Settling Ponds
- Embankments/Dikes

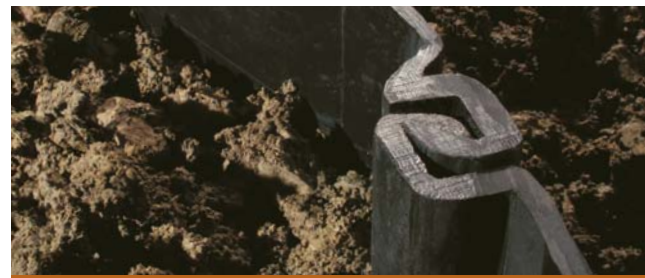

- Larssen interlocks have a proven record with the most H<sub>2</sub>O-tight design available
- The special Larssen design creates multiple contact points that restrict seepage and increase interlock sedimentation
- Interlocks can be further sealed by using a hydrophilic sealant

## Larssen Interlock System

